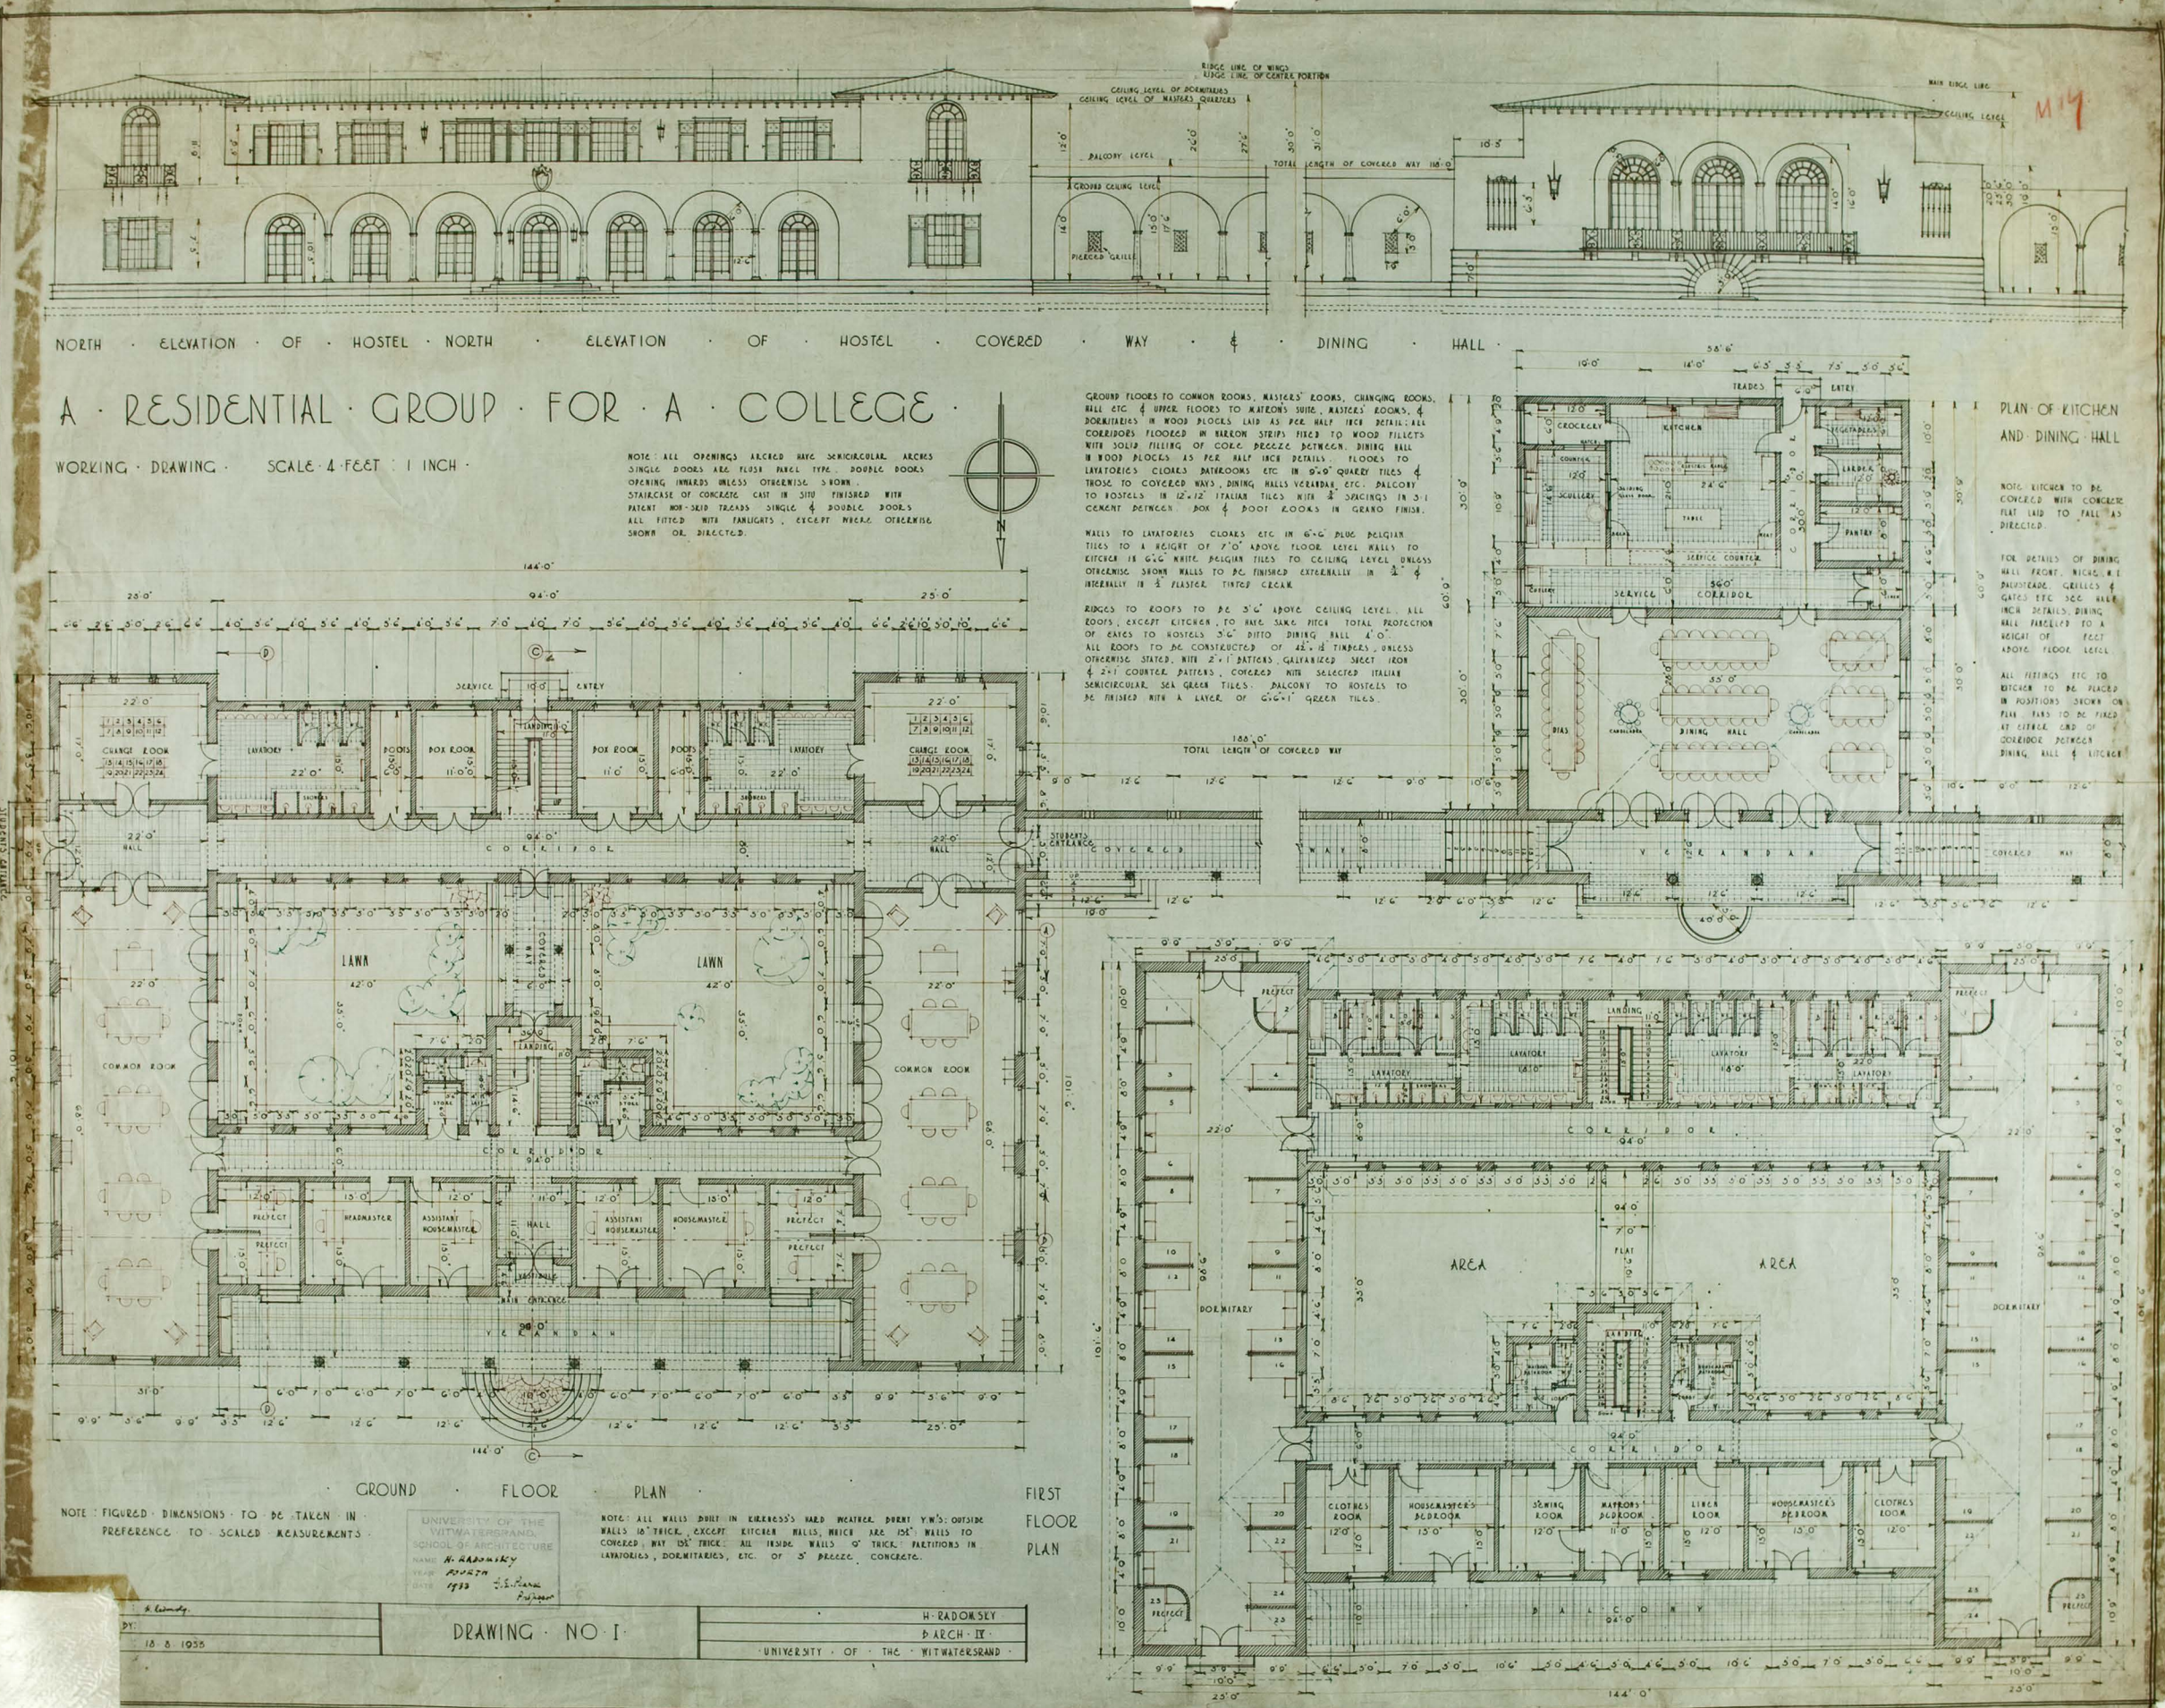
M 14
NORTH · ELEVATION · OF · HOSTEL
NORTH · ELEVATION · OF · HOSTEL · COVERED · WAY · & · DINING · HALL ·
A · RESIDENTIAL · GROUP · FOR · A · COLLEGE ·
WORKING · DRAWING · SCALE · 4 · FEET : 1 INCH ·
NOTE: ALL OPENINGS ARCHED HAVE SEMICIRCULAR ARCHES SINGLE DOORS ARE FLUSH PANEL TYPE. DOUBLE DOORS OPENING INWARDS UNLESS OTHERWISE SHOWN. STAIRCASE OF CONCRETE CAST IN SITU FINISHED WITH PATENT NON-SKID TREADS SINGLE & DOUBLE DOORS ALL FITTED WITH FANLIGHTS, EXCEPT WHERE OTHERWISE SHOWN OR DIRECTED.
GROUND FLOORS TO COMMON ROOMS, MASTERS' ROOMS, CHANGING ROOMS, HALL ETC & UPPER FLOORS TO MATRON'S SUITE, MASTERS' ROOMS, & DORMITARIES IN WOOD BLOCKS LAID AS PER HALF INCH DETAIL: ALL CORRIDORS FLOORED IN NARROW STRIPS FIXED TO WOOD FILLETS WITH SOLID FILLING OF COKE BREEZE BETWEEN. DINING HALL IN WOOD BLOCKS AS PER HALF INCH DETAILS. FLOORS TO LAVATORIES CLOAKS BATHROOMS ETC IN 9"×9" QUARRY TILES & THOSE TO COVERED WAYS, DINING HALLS VERANDAH, ETC. BALCONY TO HOSTELS IN 12"×12" ITALIAN TILES WITH ¼" SPACINGS IN 3:1 CEMENT BETWEEN. BOX & BOOT ROOMS IN GRANO FINISH.
WALLS TO LAVATORIES CLOAKS ETC IN 6"×6" BLUE BELGIAN TILES TO A HEIGHT OF 7'0" ABOVE FLOOR LEVEL WALLS TO KITCHEN IN 6"×6" WHITE BELGIAN TILES TO CEILING LEVEL UNLESS OTHERWISE SHOWN WALLS TO BE FINISHED EXTERNALLY IN ¾" & INTERNALLY IN ½" PLASTER TINTED CREAM.
RIDGES TO ROOFS TO BE 5'6" ABOVE CEILING LEVEL. ALL ROOFS, EXCEPT KITCHEN, TO HAVE SAME PITCH TOTAL PROTECTION OF EAVES TO HOSTELS 3'6" DITTO DINING HALL 4'0". ALL ROOFS TO BE CONSTRUCTED OF 4½"×1½" TIMBERS, UNLESS OTHERWISE STATED, WITH 2"×1" BATTENS, GALVANIZED SHEET IRON & 2×1 COUNTER BATTENS, COVERED WITH SELECTED ITALIAN SEMICIRCULAR SEA GREEN TILES. BALCONY TO HOSTELS TO BE FINISHED WITH A LAYER OF 6"6"×1" GREEN TILES.
PLAN · OF · KITCHEN AND · DINING · HALL
NOTE KITCHEN TO BE COVERED WITH CONCRETE FLAT LAID TO FALL AS DIRECTED.
FOR DETAILS OF DINING HALL FRONT, NICHE, & BALUSTRADE, GRILLES & GATES ETC SEE HALF INCH DETAILS. DINING HALL PANELLED TO A HEIGHT OF FEET ABOVE FLOOR LEVEL
ALL FITTINGS ETC TO KITCHEN TO BE PLACED IN POSITIONS SHOWN ON PLAN. FANS TO BE FIXED AT EITHER END OF CORRIDOR BETWEEN DINING HALL & KITCHEN
TOTAL LENGTH OF COVERED WAY
KITCHEN
DINING HALL
VERANDAH
CHANGE ROOM
LAVATORY
BOX ROOM
BOOTS
CORRIDOR
LAWN
COMMON ROOM
HEADMASTER
ASSISTANT HOUSEMASTER
HOUSEMASTER
PREFECT
HALL
MAIN ENTRANCE
DORMITARY
AREA
CLOTHES ROOM
HOUSEMASTER'S BEDROOM
SEWING ROOM
MATRON'S BEDROOM
LINEN ROOM
BALCONY
· GROUND · FLOOR · PLAN ·
FIRST FLOOR PLAN
NOTE : FIGURED · DIMENSIONS · TO · BE · TAKEN · IN · PREFERENCE · TO · SCALED · MEASUREMENTS ·
UNIVERSITY OF THE WITWATERSRAND, SCHOOL OF ARCHITECTURE
NAME H. RADOMSKY
YEAR FOURTH
DATE 1933
NOTE: ALL WALLS BUILT IN KIRKNESS'S HARD WEATHER BURNT Y.W'S: OUTSIDE WALLS 18" THICK, EXCEPT KITCHEN WALLS, WHICH ARE 13½": WALLS TO COVERED WAY 13½" THICK: ALL INSIDE WALLS 9" THICK: PARTITIONS IN LAVATORIES, DORMITARIES, ETC. OF 3" BREEZE CONCRETE.
18 . 8 . 1933
DRAWING · NO · I ·
H · RADOMSKY
B ARCH · IV ·
· UNIVERSITY · OF · THE · WITWATERSRAND ·